

Sonnet MORPHEUS



Morpheus owner's manual

Updated 10-11-2019

Sonnet

MORPHEUS

Introduction

Dear Customer,

What more can you do after a long period of launching one of the best dacs available today? The idea of having similar high end sound like the older top designs but in an affordable version! Introducing Morpheus by Sonnet Digital Audio, a powerful Digital Pre Amplifier , a product that is comparable to others with a price that is twice as high! The biggest difference between his predecessors is the fact that the Morpheus is based on a new generation of R2R ladder dacs, using improved forward correction technology. The amount of energy as used in earlier models was unacceptable as it forced our designers to use huge power supplies and larger areas for electronics. Now by using the new SDA-2 dac module power requirements has decreased by a third. This reduction leads to lesser heat and therefore more R2R ladders can be used on a smaller area. By placing these modules in upright position even more space was available so as a result we were able to use four modules.

As the SDA-2 module is using four R2R ladder networks in balanced mode, a total of sixteen R2R ladders are involved to give the Morpheus top performance. Needless to say that we use Non Oversampling techniques. Our own designed and engineered DAC chips will guarantee a unique listening experience! The result of this process is an extremely high linearity, right down to -144 dB, which gives the Morpheus a realistic 24 bit dynamic range. Due to new technology as used for the Volume control, the Morpheus can be used in both "variable" or "fixed mode". As a result the Morpheus can be used as a digital pre amplifier and driving power amplifiers directly without intervention of a normal pre amplifier or as a normal dac having a fixed output level . Due to this new approach the Morpheus is a step forwards as it omits all electronics as used for a normal pre-amplifier. It is musical, honors the Non-oversampling principle and simultaneously incorporating the technological progress that has been made over the years while developing our products.

We wish you many years of enjoyment experiencing music!

You're sincerely

Sonnet Digital Audio

IMPORTANT SAFETY INSTRUCTIONS

1. Read Instructions.
2. Keep these Instructions.
3. Heed all Warnings.
4. Follow all Instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
8. Unplug this apparatus during lightning storms or when unused for long periods of time.
9. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as a power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
10. The Morpheus pre amplifier must be placed on a firm, level surface where it is not exposed to dripping or splashing.
11. Before making connections to the dac, ensure that the power is off and other components are in mute or stand-by mode. Make sure all cable terminations are of the highest quality, free from frayed ends, short circuits, or cold solder joints.
12. THERE ARE NO USER SERVICEABLE PARTS INSIDE THE "Morpheus" pre amplifier.
Please contact Sonnet Digital Audio if you have any questions not addressed in this guide.
13. Sonnet Digital Audio cannot be held accountable and/or responsible for any form of damage or health issues inflicted to you, other people, pets, companies and non-living objects, that are caused by any form of usage of the product which is not described in this manual.
14. By actually using this product and turning it on for the first time, you agree to these terms



Caution! Please connect your interconnects first before connecting the mains power cable!

Power requirements: Check if the product is made conform the power requirements of your area. On the back side the product is marked for the specific mains voltage.

Optical input: Use an optical (Toslink) cable to use the optical input. The optical input can be used for sampling rates up to 96 kHz.

Coaxial input: A 75 Ohm coaxial cable should be used to connect the dac to other digital equipment. To avoid ground loops it has a galvanic isolation and can handle a maximum sample rate of 192 kHz

USB input: Use an USB cable to connect the dac to your computer. Only when using a Windows operating system you should install special drivers. In case of Linux or MAC no drivers are required. The USB input can handle sampling rates up to 384 kHz. (For installing drivers for PC , Linux or MAC, we refer to the website of the USB manufacturer <https://amanero.com/drivers.htm>)


RCA outputs: Standard interlinks can be used to connect the dac to your amplifier. The "Morpheus" is designed conform the "Red book standard" so the maximum output will be 2 Volts RMS . Your (pre)amplifier should handle this output levels.

XLR outputs: Standard XLR line cables should be used to connect the dac to your (pre) amplifier. The "Morpheus" is designed conform the "Red book standard" so the maximum output for the XLR output will be 4 Volts RMS. Your (pre)amplifier should handle this output levels.

Mains inlet: Use a power cable to a grounded power outlet.

Remote switch: Depending the type of power amplifier it is possible to switch it "On" or "Off" by using one or both of the remote switches. For connection a 3 pole XLR mini connector can be used and depending the way your power amplifier should be powered, it can be wired accordingly. The following connections are available:

- A) **Common**
- B) **Normally closed when Morpheus is switched off.**
- C) **Normally open when Morpheus is switched off.**

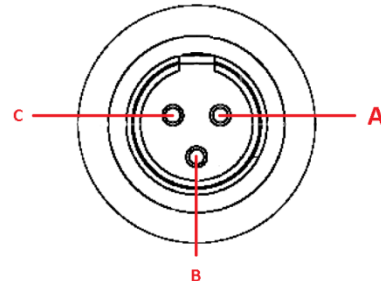



Remark: When the Morpheus is fully connected and switched to "on" for the very first time, the volume will be set to -40dB. Every time when the Morpheus is removed from mains, this setting is coming back and is built in to avoid excessive volume levels in case that the unit is used as a digital pre amplifier. During normal use the unit will remember his last setting. When using the Morpheus in conjunction with a normal analog pre amplifier it can be used in "Fixed mode" In Fixed mode the Morpheus will give a fixed output level, based on user preset value. In fixed mode the user setting will be stored in memory and always remembered, also after removing the unit from mains.

Standby position : To reduce power, the dac mother board will be switched “Off” in stand-by mode. Just the front panel is activated to control the system. Power consumption will be reduced to 0.5 Watts. Any control is possible by using the front power button or the remote control.

Source selection: The digital inputs can be selected by pressing the source button at the front . When switching the Morpheus to “On”, the first channel (Coax) will be selected. When pressing this button repeatedly, the next “AES/EBU ” input will be selected followed by “Optical” and “USB”. The next step is back to “Coax” again. In case of using the remote control, source selection can be done in two directions.

Volume control: The volume control is a so called rotary encoder so it has no end stops like a normal potentiometer. By turning the volume knob, the output level will be changed in steps of + or - 1 dB. After reaching a level of -64 dB the Morpheus will automatically switch to mute mode. Increasing the volume level will disable the mute setting. In case that the Morpheus is set for “fixed output level” the volume knob has no function except the “mute function”. The volume level is visible on the front panel display by exact Decibel level and a thermometer scale. In fixed mode the display tells you the fixed user setting like -10dB. The “F” stands for fixed.

Mute function: By pressing the volume knob the Morpheus will switch into “mute mode” Pressing the volume knob again brings back the actual volume level. The mute status is visible on the front panel display.

Error indication: When no digital data is coming in, the front panel display will show “NO DATA ”

Enter the menu settings

The menu settings are accessible by pressing both source and power buttons simultaneously. The following settings are available:

Variable /Fixed volume By default the Morpheus is set for variable volume setting . In the menu this can be set to a fixed level and is based on the last volume setting. So in case that the volume level was set for -10dB the Morpheus can be used as a normal dac having a fixed level of -10dB. Especially in case of very sensitive pre-amplifiers this setting can avoid overload of the amplifier input circuitry . When the Morpheus is switched to “Off” this setting is still in the memory and comes back when the Morpheus is switched to “On” . Even when the Morpheus is disconnected from mains this fixed setting will be remembered.

First set your volume for the desired volume setting. To set the Morpheus to “fixed” mode press both front panel buttons on the Morpheus simultaneously to enter the menu mode. The following display will be visible:



Rotate the Volume knob clockwise until the display shows the “On” status. Next press the volume knob to enter this new setting into the memory.



The new setting will be visible and were the “F” stands for “Fixed” Leave the menu by pressing the front panel source button.



Back light By default the back light of the display is switched to “on”. By entering this menu setting, the user can select that the display is “On” only in case of an event like changing volume or selecting a source, but will switched “Off” after the time set by the user . The time that the display is “on” can be changed from 1 to 60 seconds. To set the display “On time” press both front panel buttons on the Morpheus simultaneously to enter the menu mode. The volume setting is the first item visible. Now use the source button on the front of the Morpheus only ones to enter the display mode. The following display will be visible:



Rotating the volume knob clockwise tells the number of seconds that the display remains “On” . Push the volume knob until the right “On time” is found. The set volume level is stored in the memory of the Morpheus.



Menu settings

DSP functions Options like MQA or other DSP modules are detected automatically when installed but can be bypassed in the menu. By default the “MQA/DSP” option is switched to “On” . To set the “MQA/DSP” to “Off” press both front panel buttons on the Morpheus simultaneously to enter the menu mode. The volume setting is the first item visible. Now use the source button on the front of the Morpheus twice to enter the “MQA/DSP” mode. The following display will be visible:



Turn the volume knob counter clockwise to switch the “MQA/DSP” function to Off. Rotating the volume knob clockwise will activate the “MQA/DSP” setting again. Press the volume knob to enter this setting in the memory of the Morpheus.



Leave the menu by pressing the source button on the front panel of the Morpheus.

Sonnet

MORPHEUS

Specifications

Fully balanced Non oversampling DAC

Two SDA-2 dac modules per channel in differential mode

Power supply 15VA 110/115V AC 220/230V AC 60/50Hz. Power consumption max. 8 Watts.

Input 1x optical, 1x coaxial and 1x AES/EBU and USB

Output 1x stereo pair single ended 2 Volts RMS

Output 1x stereo pair XLR balanced 4 Volts RMS

Frequency Response 44.1 kHz sampling 1Hz – 20 kHz -2.5 dB

Frequency Response 192 kHz sampling 1Hz – 65 kHz – 3dB and 384kHz (USB)

Distortion 0.004% THD

Noise Floor -155 dB related to 2 Volt RMS

Output impedance RCA 100 Ohm, XLR 100 Ohm

Sampling rate Optical 44.1 – 96 kHz

Sampling rate Coax and AES/EBU: 44.1 -192 kHz

Sampling rate USB 44.1 – 384kHz

Aluminum six button remote control included.

MQA or the I2S option is available as an option. (I2S option can be installed instead of the USB module)

Dimensions 290 x 250 x 60 mm

Weight 3.2KG



Sonnet

MORPHEUS

Company info



Sonnet Digital Audio BV
Daviottenweg 9-11,
5222 BH 's-Hertogenbosch
The Netherlands

Phone: sales office: +31(0)36-7856259
Email: info@sonnet-audio.com
Website: <https://www.sonnet-audio.com>
Chamber of commerce 's-Hertogenbosch: 75452081
BTW / VAT: NL860288110B01